



NOTES:

1. CDD UTILITY INFORMATION CAN BE OBTAINED BY EMAILING CDDENGINEERING@SF.WATER.ORG.
2. WHEN UTILITY LOCATION AND / OR DEPTH IS NOT AVAILABLE IN RECORD DRAWINGS, POT-HOLING SHALL BE PERFORMED TO VERIFY DEPTH / LOCATION.
3. SHORING / TIEBACK PERMIT SUBMITTAL SHALL SHOW PLAN AND SECTION VIEWS OF ALL CDD FACILITIES WITHIN THE TIEBACK ZONE.
4. TIEBACKS / SOIL NAILS SHALL NOT PASS WITHIN 5- FEET OF CDD FACILITIES (MEASURED FROM OUTSIDE EDGE OF FACILITY). THE DISTANCE BETWEEN THE TIEBACKS/SOIL NAILS AND CDD FACILITIES SHALL BE CALLED OUT ON THE PLANS.

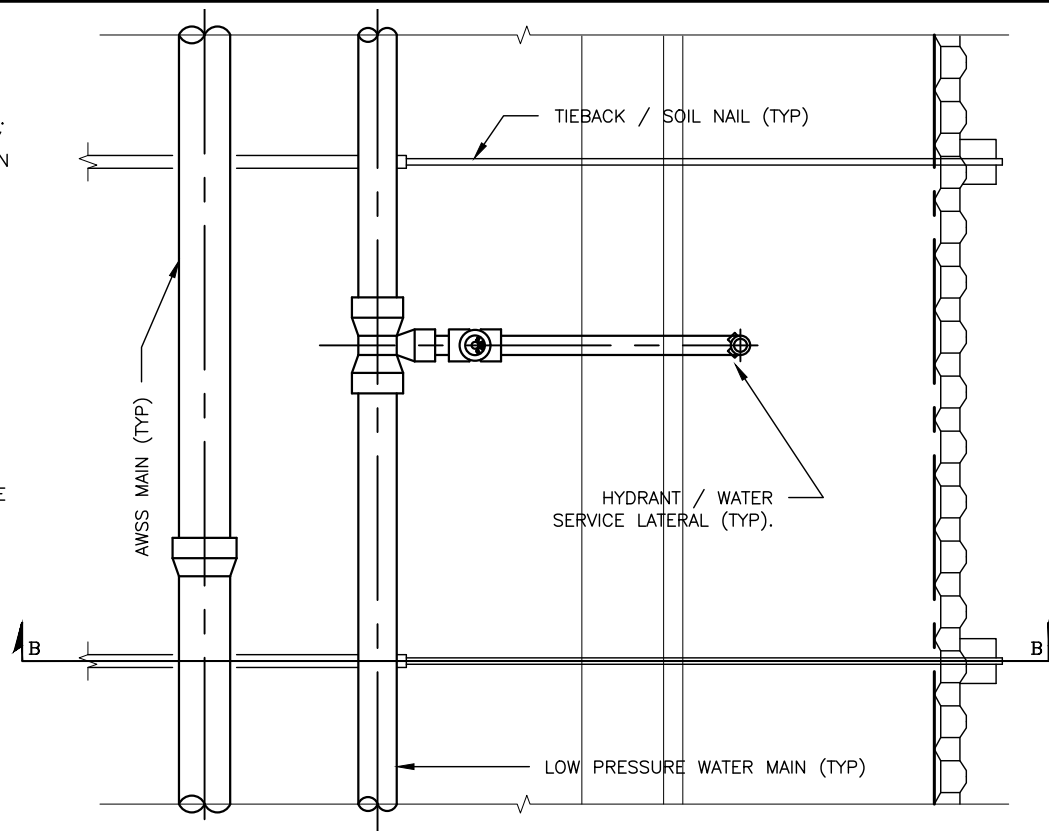

A PLAN VIEW
- N.T.S.

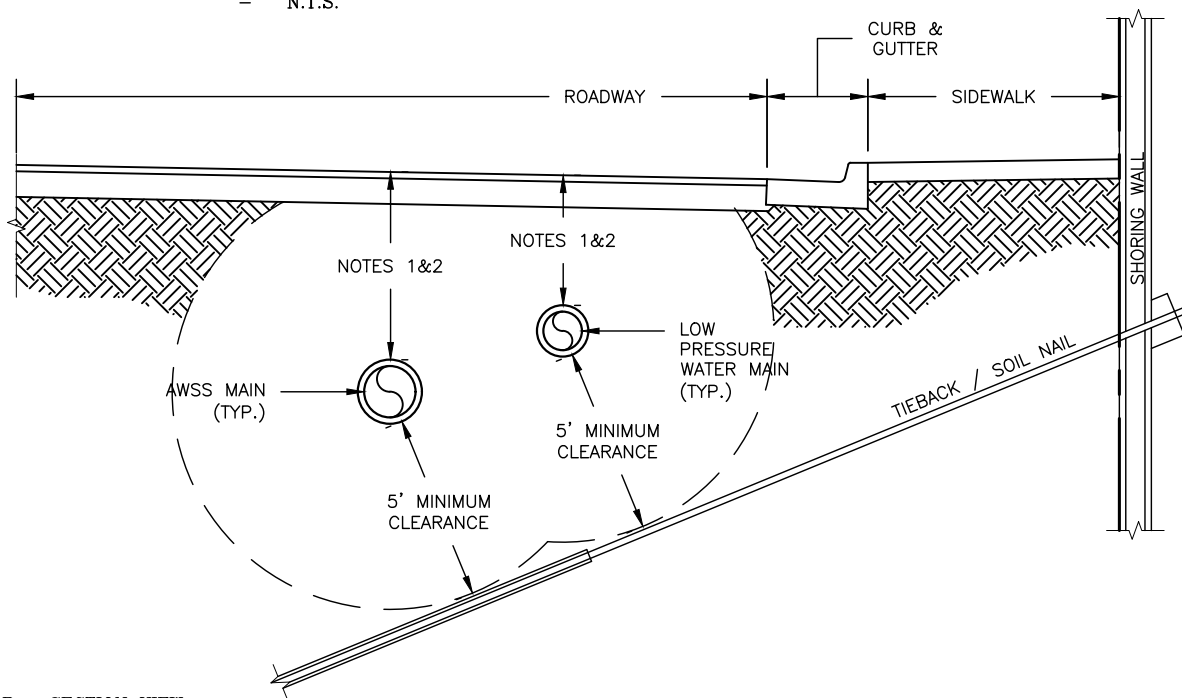

B SECTION VIEW
- N.T.S.



San Francisco
**Water
Power
Sewer**

Services of the San Francisco Public Utilities Commission

WATER ENTERPRISE - CITY DISTRIBUTION DIVISION STANDARD PLANS

**MISCELLANEOUS
MINIMUM CLEARANCE BETWEEN TIEBACKS AND CDD
FACILITIES**

DATE 10/1/2016

REV.

DRAWING NO.

SHEET

SCALE N.T.S.

0

CDD-LPHP-304

96